

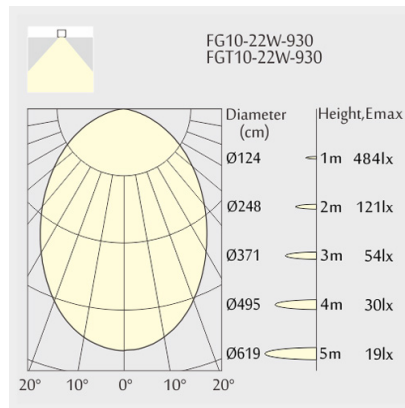


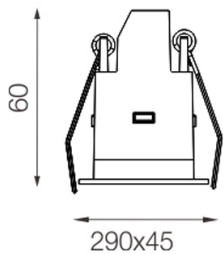

FG10-8277522P-BB

Square recessed ceiling downlight made of die-cast aluminium with black powder-coating finish (RAL 9005) and black reflector, Phase Dim Driver, LED 22W, measurement 290mm x 45mm, ceiling cutout of 282mm x 37mm with a narrow mounting trim, luminaires weight is approximately 500g, CCT 2700K with an LED Output of 2400lm, decent color rendering at an index of CRI80, after a lifetime of 50000h min. 80% of the luminous flux with energy efficient OSRAM LED Chips, 5 years warranty, wide beam characteristic with 75° beam angle, degree of housing protection according to DIN EN 60529 (IP20)

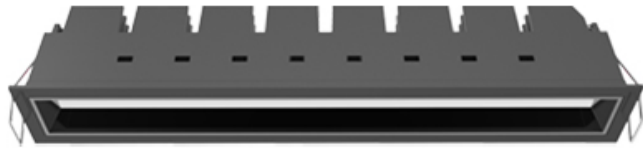

Downloads

- [Instructions](#)
- [Photometry](#)

Brand

Neko

Designer

Neko

Type

Ceiling

Electrical Characteristics

IP 20
31V
24W W

Material

die-cast-aluminium

Photometric Data

Beam Angle: 75° W
80

Dimension

Light Temperature

2700K

Colour/Finish

black

