



FGTA-8407522A-BB

Square recessed ceiling downlight made of die-cast aluminium with black powder-coating finish (RAL 9005) and black reflector, 1-10V Dim Driver, LED 22W, measurement 286.5mm x 41mm, ceiling cutout of 290mm x 44mm with a trimless mounting, luminaires weight is approximately 800g, CCT 4000K with an LED Output of 2800lm, decent color rendering at an index of CRI80, after a lifetime of 50000h min. 80% of the luminous flux with energy efficient OSRAM LED Chips, 5 years warranty, wide beam characteristic with 75° beam angle, degree of housing protection according to DIN EN 60529 (IP20)

Downloads

- Instructions
- Photometry

Brand

Neko

Designer

Neko

Type

Ceiling

Electrical Characteristics



IP 20
31V
24W W

Material

die-cast-aluminium

Photometric Data

Beam Angle: 75° W
80

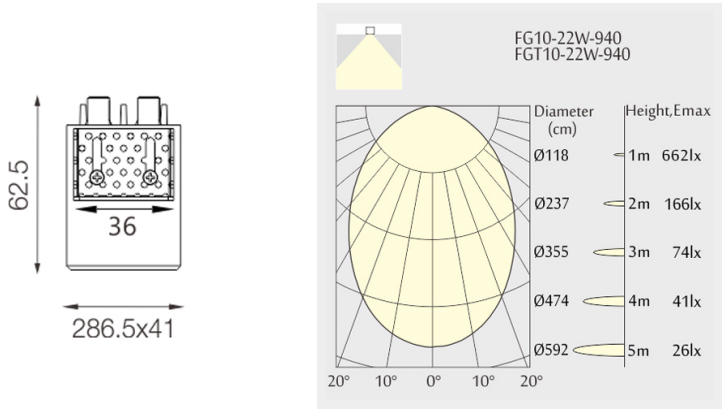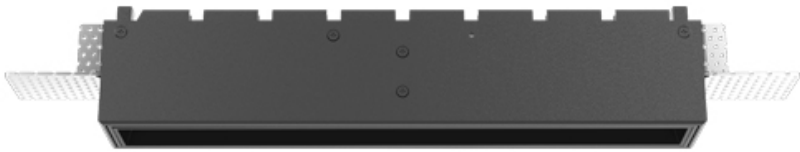

Dimension

Light Temperature

4000K

Colour/Finish

black

