




MCL1-9273028D-WG

Round ceiling mounted downlight made of die-cast-aluminium with DALI Dim driver, white powdercoating finish (RAL 9016) and gold reflector, LED 25W, measurement Ø90mm, luminaires weight is approximately 1200g, CCT 2700K with an LED Output of 3200lm, high color rendering at an index of CRI90, after a lifetime of 50000h min. 80% of the luminous flux with energy efficient CITIZEN LED Chips, 5 years warranty, medium beam characteristic with 30° beam angle, lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<19), degree of housing protection according to DIN EN 60529 (IP20), can only be mounted in a false ceiling with access from behind the fixation tniog

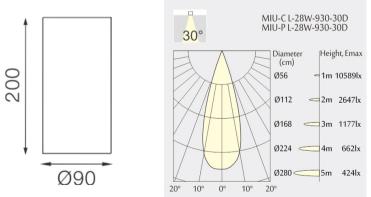

Downloads
▶ Instructions

Photometry

Brand	Designer
Neko	Neko
Туре	Electrical Characteristics
Ceiling Light	IP 20 36V
	28W W
Material	Photometric Data
die-cast-aluminium	Beam Angle: 30° W 90
	90
.	
Dimension	

Light Temperature	Colour/Finish
2700K	white