




QUAD 2 DIM DALI 3000K Z

The elegance of a squared perimeter downlight combined with the easy installation of a round fitting hole.

Downloads

- [▷ CAD](#)
- [▷ Instructions](#)
- [▷ Photometry](#)

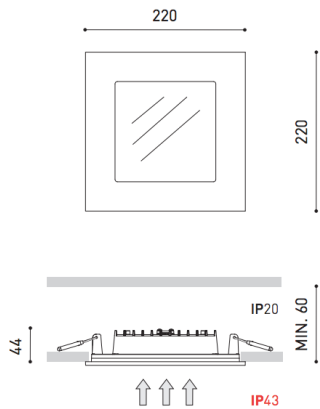

Brand

Arkoslight

Designer

Rubén Saldaña

Type

Downlight

Electrical Characteristics

IP 43
220V/240V
50/60 Hz
L80B10 (Tc=80°C)
>60.000h
MacAdam Step 2
DALI
15,5 W

Material

Aluminium, Polymethyl
Methacrylate
9006

Photometric Data

Beam Angle: 102° W
Efficiency: 76%
CRI > 90

Dimension

332x245x84 mm
Ø205
Gross Weight: 1480,7

Light Temperature

3000k

Colour/Finish

Aluminium

