




## SAPR-8409018D-BG-U

Round Rod Pendant luminaire with uplight made of die-cast-aluminium with black powder-coating finish (RAL 9005) and gold decoration ring, DALI Dim Driver, LED 18W+8W, measurement Ø350mm, luminaires weight is approximately 3950g, CCT 4000K with an LED Output of 2800lm / 1050lm, decent color rendering at an index of CRI80, after a lifetime of 50000h min. 80% of the luminous flux with energy efficient OSRAM LED Chips, 5 years warranty, wide beam characteristic with 90° / 110° beam angle, lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<19), degree of housing protection according to DIN EN 60529 (IP40)

Brand	Designer
Neko	Neko
Туре	Electrical Characteristics
Pendant Light	IP 40 36V/33V 20W/10W W
Material	Photometric Data

Beam Angle: 10° W

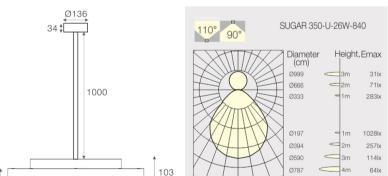

10° 0° 10° 20°

## Downloads

▶ Instructions▶ Photometry

Dimension

die-cast-aluminium

Light Temperature Colour/Finish
4000K black

Ø350