




## SAPW-8279018A-BG-U

Round direct luminaire with uplight made of die-cast-aluminium with black powder-coating finish (RAL 9005) and gold decoration ring, 1-10V Dim Driver, LED 18W+8W, measurement Ø350mm, luminaires weight is approximately 3600g, CCT 2700K with an LED Output of 2400lm / 900lm, decent color rendering at an index of CRI80, after a lifetime of 50000h min. 80% of the luminous flux with energy efficient OSRAM LED Chips, 5 years warranty, wide beam characteristic with 90° / 110° beam angle, lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<19), degree of housing protection according to DIN EN 60529 (IP40)



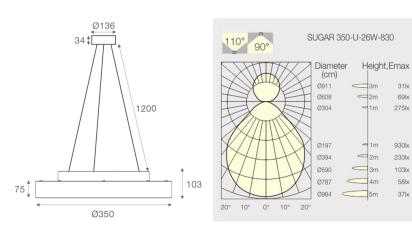

▷ Instructions > Photometry

Brand	Designer
Neko	Neko
Туре	<b>Electrical Characteristics</b>
Pendant Light	IP 40 36V/33V 20W/10W W
Material	Photometric Data
die-cast-aluminium	Beam Angle: 10° W

80

Dimension

Light Temperature Colour/Finish 2700K black



31lx

69lx

275lx

930lx

233lx

103lx

58lx

37lx