

SAPW-8279018D-WW-U

Round direct luminaire with uplight made of die-cast-aluminium with white powder-coating finish (RAL 9016) and white decoration ring, DALI Dim Driver, LED 18W+8W, measurement Ø350mm, luminaires weight is approximately 3600g, CCT 2700K with an LED Output of 2400lm / 900lm, decent color rendering at an index of CRI80, after a lifetime of 50000h min. 80% of the luminous flux with energy efficient OSRAM LED Chips, 5 years warranty, wide beam characteristic with 90° / 110° beam angle, lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<19), degree of housing protection according to DIN EN 60529 (IP40)

Brand

Neko

Designer

Neko

Type

Pendant Light

Electrical Characteristics



IP 40
36V/33V
20W/10W W

Material

die-cast-aluminium

Photometric Data

Beam Angle: 10° W
80

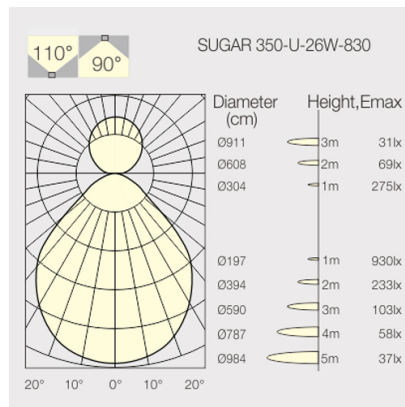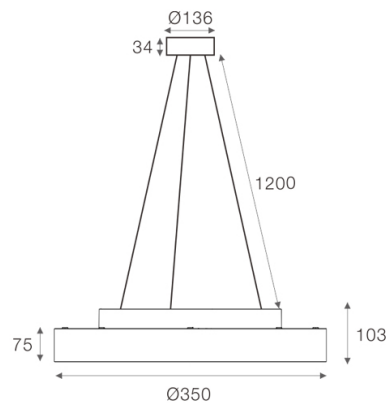

Downloads

[▶ Instructions](#)

[▶ Photometry](#)

Dimension

Light Temperature

2700K

Colour/Finish

white

