

## SAPW-8309018P-WW-U

Round direct luminaire with uplight made of die-cast-aluminium with white powder-coating finish (RAL 9016) and white decoration ring, Phase Dim Driver, LED 18W+8W, measurement Ø350mm, luminaires weight is approximately 3600g, CCT 3000K with an LED Output of 2600lm / 950lm, decent color rendering at an index of CRI80, after a lifetime of 50000h min. 80% of the luminous flux with energy efficient OSRAM LED Chips, 5 years warranty, wide beam characteristic with 90° / 110° beam angle, lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<19), degree of housing protection according to DIN EN 60529 (IP40)

### Brand

Neko

### Designer

Neko

### Type

Pendant Light

### Electrical Characteristics



IP 40  
36V/33V  
20W/10W W

### Material

die-cast-aluminium

### Photometric Data

Beam Angle: 10° W  
80

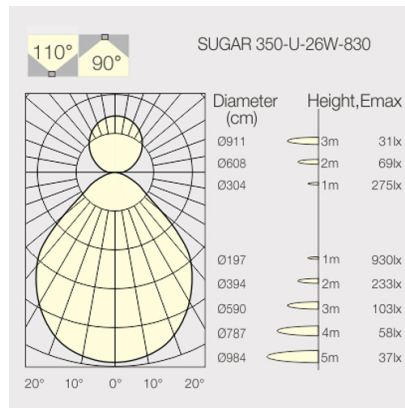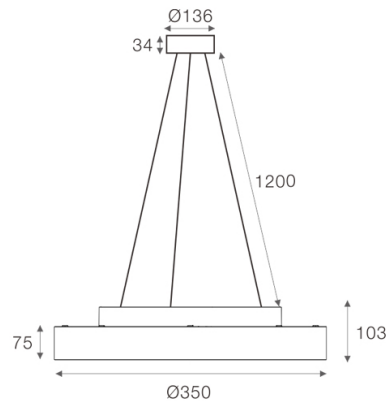

## Downloads

[▶ Instructions](#)

[▶ Photometry](#)

## Dimension

### Light Temperature

3000K

### Colour/Finish

white

