

## SAPW-8409012P-BG-U

Round direct luminaire with uplight made of die-cast-aluminium with black powder-coating finish (RAL 9005) and gold decoration ring, Phase Dim Driver, LED 12W+8W, measurement Ø350mm, luminaires weight is approximately 3600g, CCT 4000K with an LED Output of 2000lm / 1050lm, decent color rendering at an index of CRI80, after a lifetime of 50000h min. 80% of the luminous flux with energy efficient OSRAM LED Chips, 5 years warranty, wide beam characteristic with 90° / 110° beam angle, lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<19), degree of housing protection according to DIN EN 60529 (IP40)

### Brand

Neko

### Designer

Neko

### Type

Pendant Light

### Electrical Characteristics

IP 40  
36V/33V  
14W/10W W

### Material



die-cast-aluminium

### Photometric Data

Beam Angle: 10° W  
80

## Downloads

- [Instructions](#)
- [Photometry](#)

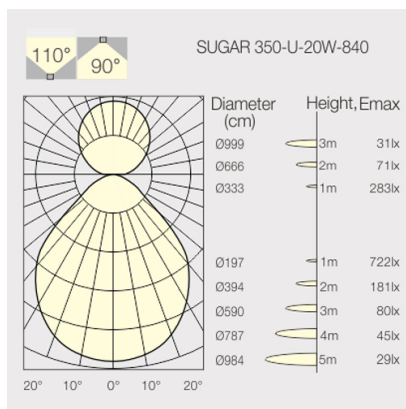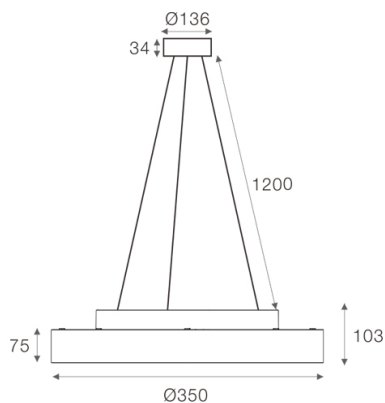

### Dimension

### Light Temperature

4000K

### Colour/Finish

black

