



## TL1-8301825A-BB

Round recessed mounted  
Downlight made of die-cast  
aluminium with black powder-  
coating finish (RAL 9005) and black  
reflector, 1-10V Dim Driver, LED  
25W, measurement Ø218mm,  
narrow mounting trim with a cutout  
of Ø200mm, luminaires weight is  
approximately 1700g, CCT 3000K  
with an LED Output of 3600lm,  
decent color rendering at an index  
of CRI80, after a lifetime of  
50000h min. 80% of the luminous  
flux with energy efficient CITIZEN  
LED Chips, 5 years warranty,  
precise beam characteristic with 18°  
beam angle, lighting perfectly  
suitable for reading, writing as well  
as computer and control work  
according to DIN EN 12464-1  
(UGR<19), degree of housing  
protection according to DIN EN  
60529 (IP54)

### Brand

Neko

### Designer

Neko

### Type

Ceiling

### Electrical Characteristics



IP 54  
36V  
28W W

### Material

die-cast aluminium

### Photometric Data

Beam Angle: 18° W  
80

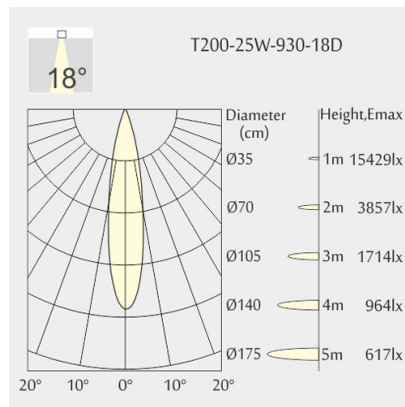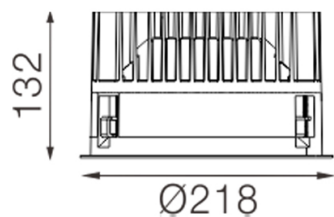

## Downloads

- [Instructions](#)
- [Photometry](#)

## Dimension

### Light Temperature

3000K

### Colour/Finish

powder-coated

