
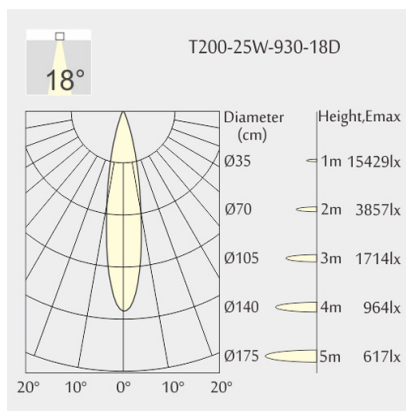


TL1-8301825A-BM

Round recessed mounted Downlight made of die-cast aluminium with black powder-coating finish (RAL 9005) and matt reflector, 1-10V Dim Driver, LED 25W, measurement Ø218mm, narrow mounting trim with a cutout of Ø200mm, luminaires weight is approximately 1700g, CCT 3000K with an LED Output of 3600lm, decent color rendering at an index of CRI80, after a lifetime of 50000h min. 80% of the luminous flux with energy efficient CITIZEN LED Chips, 5 years warranty, precise beam characteristic with 18° beam angle, lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<19), degree of housing protection according to DIN EN 60529 (IP54)

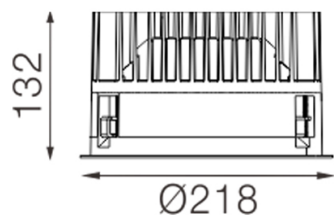

Downloads

- [Instructions](#)
- [Photometry](#)

Brand

Neko

Designer

Neko

Type

Ceiling

Electrical Characteristics

IP 54
36V
28W W

Material

die-cast aluminium

Photometric Data

Beam Angle: 18° W
80

Dimension

Light Temperature

3000K

Colour/Finish

powder-coated

