



TL1-8301825A-WW

Round recessed mounted
Downlight made of die-cast
aluminium with white powder-
coating finish (RAL 9016) and white
reflector, 1-10V Dim Driver, LED
25W, measurement Ø218mm,
narrow mounting trim with a cutout
of Ø200mm, luminaires weight is
approximately 1700g, CCT 3000K
with an LED Output of 3600lm,
decent color rendering at an index
of CRI80, after a lifetime of
50000h min. 80% of the luminous
flux with energy efficient CITIZEN
LED Chips, 5 years warranty,
precise beam characteristic with 18°
beam angle, degree of housing
protection according to DIN EN
60529 (IP54)

Downloads

- [Instructions](#)
- [Photometry](#)

Brand

Neko

Designer

Neko

Type

Ceiling

Electrical Characteristics

IP 54
36V
28W W



Material

die-cast aluminium

Photometric Data

Beam Angle: 18° W
80

Dimension

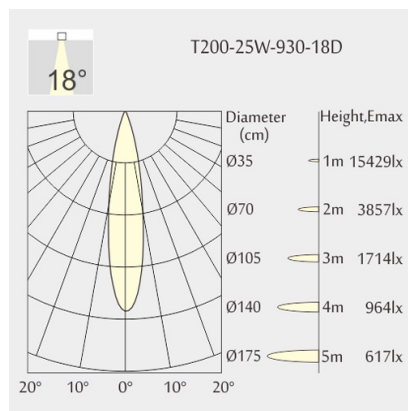

Light Temperature

3000K

Colour/Finish

powder-coated

