



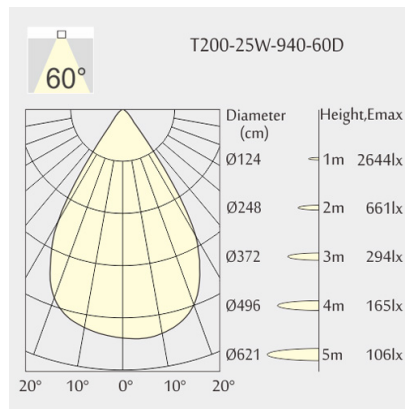

TL1-8406025D-BB

Round recessed mounted
Downlight made of die-cast
aluminium with black powder-
coating finish (RAL 9005) and black
reflector, DALI Dim Driver, LED
25W, measurement Ø218mm,
narrow mounting trim with a cutout
of Ø200mm, luminaires weight is
approximately 1700g, CCT 4000K
with an LED Output of 3800lm,
decent color rendering at an index
of CRI80, after a lifetime of
50000h min. 80% of the luminous
flux with energy efficient CITIZEN
LED Chips, 5 years warranty, beam
characteristic with 60° beam angle,
lighting perfectly suitable for
reading, writing as well as
computer and control work
according to DIN EN 12464-1
(UGR<19), degree of housing
protection according to DIN EN
60529 (IP54)

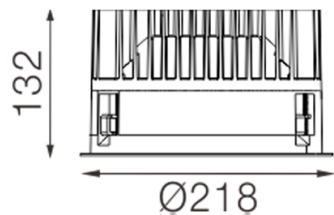

Brand

Neko

Designer

Neko

Type

Ceiling

Electrical Characteristics

IP 54
36V
28W W

Material

die-cast aluminium

Photometric Data

Beam Angle: 60° W
80

Downloads

- [Instructions](#)
- [Photometry](#)

Dimension

Light Temperature

4000K

Colour/Finish

powder-coated

