





TL1-9276025N-WB

Round recessed mounted Downlight made of die-cast aluminium with white powdercoating finish (RAL 9016) and black reflector, LED 25W, measurement Ø218mm, narrow mounting trim with a cutout of Ø200mm, luminaires weight is approximately 1700g, CCT 2700K with an LED Output of 3000lm, high color rendering at an index of CRI90, after a lifetime of 50000h min. 80% of the luminous flux with energy efficient CITIZEN LED Chips, 5 years warranty, beam characteristic with 60° beam angle, lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<19), degree of housing protection according to DIN EN 60529 (IP54)

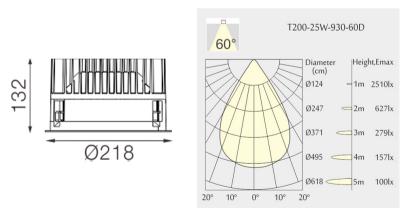

Downloads

Instructions ▷ Photometry



Dimension

Light Temperature

Colour/Finish

2700K

powder-coated