



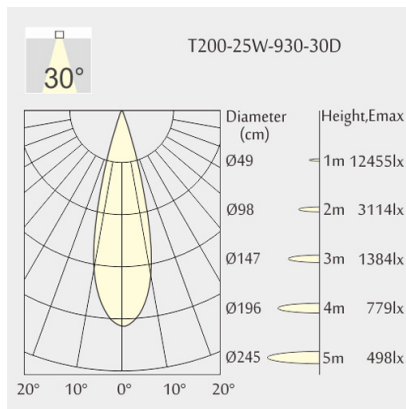

TL1-9303025A-WM

Round recessed mounted Downlight made of die-cast aluminium with white powder-coating finish (RAL 9016) and matt reflector, 1-10V Dim Driver, LED 25W, measurement Ø218mm, narrow mounting trim with a cutout of Ø200mm, luminaires weight is approximately 1700g, CCT 3000K with an LED Output of 3200lm, high color rendering at an index of CRI90, after a lifetime of 50000h min. 80% of the luminous flux with energy efficient CITIZEN LED Chips, 5 years warranty, beam characteristic with 30° beam angle, lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<19), degree of housing protection according to DIN EN 60529 (IP54)

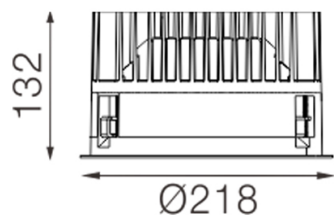

Downloads

- [Instructions](#)
- [Photometry](#)

Brand

Neko

Designer

Neko

Type

Ceiling

Electrical Characteristics

IP 54
36V
28W W

Material

die-cast aluminium

Photometric Data

Beam Angle: 30° W
90

Dimension

Light Temperature

3000K

Colour/Finish

powder-coated

