

## TL1-9401825A-BM

Round recessed mounted Downlight made of die-cast aluminium with black powder-coating finish (RAL 9005) and matt reflector, 1-10V Dim Driver, LED 25W, measurement Ø218mm, narrow mounting trim with a cutout of Ø200mm, luminaires weight is approximately 1700g, CCT 4000K with an LED Output of 3400lm, high color rendering at an index of CRI90, after a lifetime of 50000h min. 80% of the luminous flux with energy efficient CITIZEN LED Chips, 5 years warranty, precise beam characteristic with 18° beam angle, lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<19), degree of housing protection according to DIN EN 60529 (IP54)

### Brand

Neko

### Designer

Neko

### Type

Ceiling

### Electrical Characteristics



IP 54  
36V  
28W W

### Material

die-cast aluminium

### Photometric Data

Beam Angle: 18° W  
90

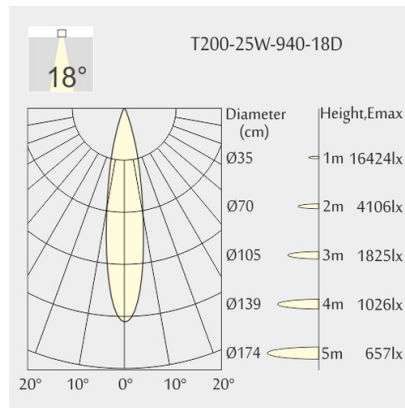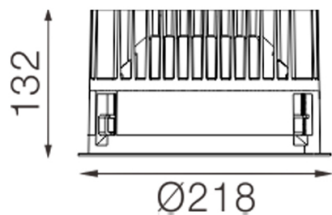

## Downloads

- [Instructions](#)
- [Photometry](#)

## Dimension

### Light Temperature

4000K

### Colour/Finish

powder-coated

