
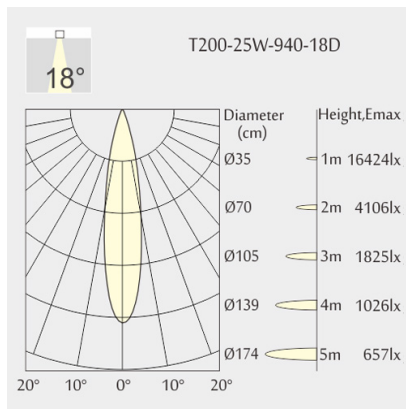


TL1-9401825P-BM

Round recessed mounted
Downlight made of die-cast
aluminium with black powder-
coating finish (RAL 9005) and matt
reflector, Phase Dim Driver, LED
25W, measurement Ø218mm,
narrow mounting trim with a cutout
of Ø200mm, luminaires weight is
approximately 1700g, CCT 4000K
with an LED Output of 3400lm,
high color rendering at an index of
CRI90, after a lifetime of 50000h
min. 80% of the luminous flux with
energy efficient CITIZEN LED
Chips, 5 years warranty, precise
beam characteristic with 18° beam
angle, lighting perfectly suitable for
reading, writing as well as
computer and control work
according to DIN EN 12464-1
(UGR<19), degree of housing
protection according to DIN EN
60529 (IP54)

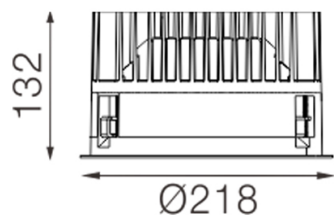

Downloads

- [Instructions](#)
- [Photometry](#)

Brand

Neko

Designer

Neko

Type

Ceiling

Electrical Characteristics

IP 54
36V
28W W

Material

die-cast aluminium

Photometric Data

Beam Angle: 18° W
90

Dimension

Light Temperature

4000K

Colour/Finish

powder-coated

